

Rugged
Powerful
Accurate
In Production Since 1933


MODEL **1016**
Manual Bandsaw

Distributed By:



Tool Technology
Distributors, Inc.

P: 510-656-8220
P: 800-335-8437
F: 510-656-2458
E: info@tooltechnology.com
W: www.tooltechnology.com

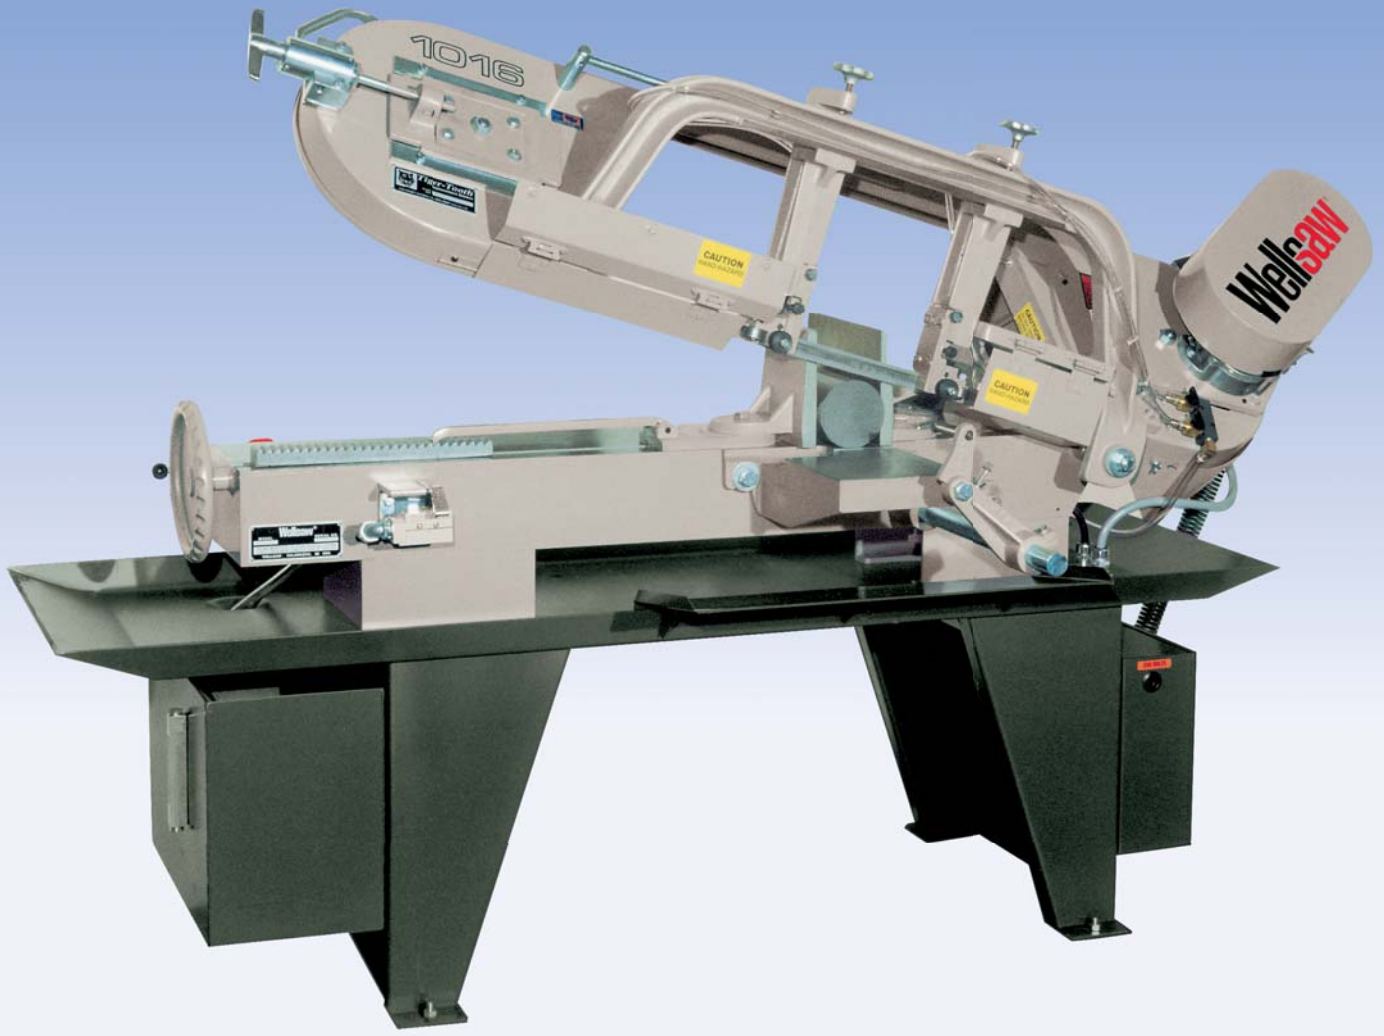

Manufactured in the United States of America

Wellsaw[®]
Built better to work stronger and last longer

1016

Model 1016 Manual Bandsaw



Standard Features

- Spring-Loaded Carbide Guides with Rollers
- Combination Reduction Gearbox and Perimeter Ring Gear Blade Drive
- 2hp Baldor® Motor
- Four Blade Speeds
- Rite-Tension® Band Tensioning Device
- Variable Hydraulic Downfeed Control
- Flood Type Wet Cutting System
- Rotary Blade Brush
- 110 Volts at Controls
- Overload and Undervoltage Protection
- Precision Ground Bed
- Quick Acting Vise
- Positive Frame Lock
- Adjustable Stock Stop/Back-Gauge
- Auto Shut-Off at End of Cut
- OSHA Blade Guarding
- Tiger-Tooth® Bi-Metal Blade
- Coolant for Initial Start-Up

Specifications

Capacity	
Round	10.5"
Flat	16.5"
Rectangular	10" x 16"
45° Angle	10" x 9"
Blade Size	1" x .035" x 11'6" (138")
Blade Speeds	50-100-175-275 SFPM
Blade Guides	Carbide Guides with Rollers
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	Tank Capacity 8 Gallons Submersible Pump 115V/ .6 Amp/170 GPH
Vise Control	Quick Acting/Manual Screw
Swivel Vise	To 45°
Feed Control	Variable Hydraulic with Counterbalance Spring
Band Wheels	15" Diameter Cast Iron
Bed Height	29"
Floor Area	40"W x 84"L
Shipping Weight	900 Lbs.

Available Factory Installed Options

- Variable Speed Blade Drive (70-375 SFPM)
- Casters (Set of 4, 2 Locking)
- NFPA Electrics (with Disconnect)
- Working Light with Transformer
- Stock Stand, 18"
- 5' Non-Powered Roller Conveyor
- 10' Non-Powered Conveyors

Distributed By:



**Tool
Technology**
Distributors, Inc.



P: 510-656-8220
P: 800-335-8437
F: 510-656-2458
E: info@tooltechnology.com
W: www.tooltechnology.com

Wellsaw®