



MODEL **613**

# Manual Bandsaw

Distributed By:



P: 510-656-8220  
P: 800-325-8437  
F: 510-656-2458  
E: info@tootechnology.com  
W: www.tootechnology.com

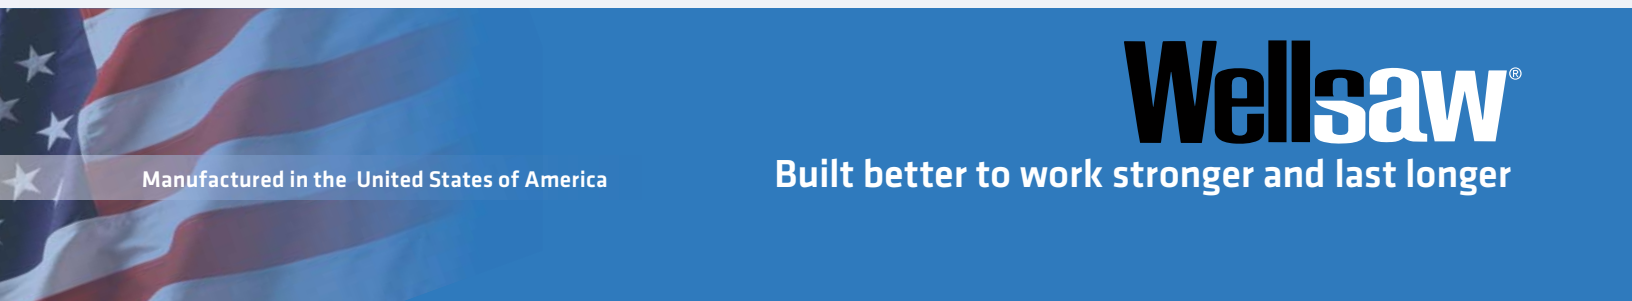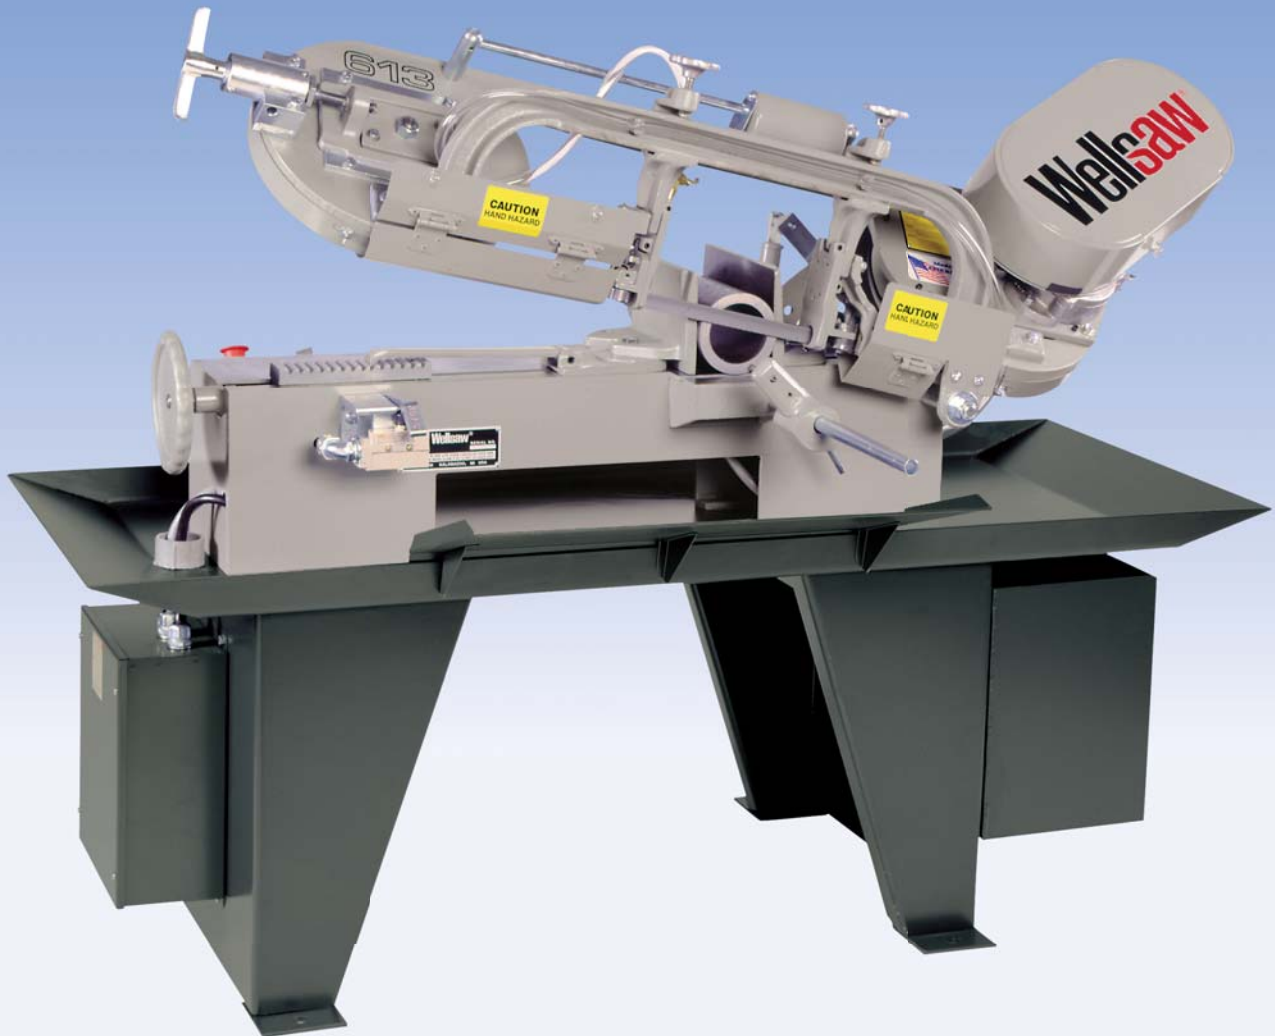

Manufactured in the United States of America

# Wellsaw®

Built better to work stronger and last longer

# 613

## Model 613 Manual Bandsaw



### Standard Features

- Hydraulic Feed Control with Adjustable Counterbalance Spring
- Ball Bearing Blade Guides
- Perimeter Ring Gear Blade Drive
- 1hp Baldor® Motor
- Four Blade Speeds
- Rite-Tension® Band Tensioning Device
- Wet Cutting System
- Blade Brush
- 110 Volts at Controls
- Overload and Undervoltage Protection
- Precision Ground Bed
- Quick Acting Vise
- Positive Frame Lock
- Adjustable Stock Stop
- Auto Shut-Off at End of Cut
- OSHA Blade Guarding
- Tiger-Tooth® Bi-Metal Blade
- Coolant for Initial Start-Up

### Available Factory Installed Options

- Variable Speed Blade Drive (70-375 SFPM)
- Casters (Set of 4, 2 Locking)
- NFPA Electrics (with Disconnect)
- Totally Enclosed Motor
- Work Light with Transformer
- Stock Stand
- 5' and 10' Non-Powered Conveyors

### Specifications

Capacity	
Round	7"
Flat	13"
Rectangular	6" x 13"
45° Angle	6" x 6-1/2"
Blade Size	3/4" x .035" x 8'3"
Blade Speeds	50-90-160-250 SFPM
Blade Guides	Six Sealed Ball Bearings
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	
Tank Capacity	8 Gallons
Submersible Pump	115V/.6 Amp/170 GPH
Vise Control	Manual Screw
Swivel Vise	To 45°
Feed Control	Hydraulic with Adjustable Counterbalance
Band Wheels	11" Diameter Cast Iron
Bed Height	29"
Floor Area	25"W x 60"L
Shipping Weight	Approx. 650 Lbs.

Distributed By:



**Tool  
Technology**  
Distributors, Inc.



P: 510-656-8220  
P: 800-335-8437  
F: 510-656-2458  
E: info@tooltechnology.com  
W: www.tooltechnology.com

# Wellsaw®